

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 May 2005 (19.05.2005)

PCT

(10) International Publication Number  
**WO 2005/044911 A1**

(51) International Patent Classification<sup>7</sup>: **C08L 23/10**

(21) International Application Number:  
PCT/IB2004/003584

(22) International Filing Date:  
3 November 2004 (03.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/518,449 6 November 2003 (06.11.2003) US

(71) Applicant (for all designated States except US): **BASELL  
POLIOLEFINE ITALIA S.p.A.** [IT/IT]; Via Pergolesi  
25, I-20124 Milano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BERTA, Dominic,**  
A. [US/US]; 210 E. Cobblefield Court, Newark, DE 19713  
(US). **PELLEGATTI, Giampaolo** [IT/IT]; Via Ca Nove 4,  
I-44032 Baura (IT).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,  
SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: **POLYPROPYLENE COMPOSITION**

(57) **Abstract:** A propylene polymer composition comprising the following components: a) from 50% to 90% by weight of a propylene homopolymer or a propylene copolymer containing up to 5% by mol of derived units of C2-C20 alpha-olefins, having the following features: (i) a polydispersity index  $PI > 3$ ; (ii) melt flow rate (MFR), as measured at 230°C under a load of 2.16 kg,  $MFR > 1$  dg/min; and (iii) fraction soluble in xylene at 25°C ( $XSRT$ )  $> 1\%$  b) from 5% to 25% by weight a copolymer of ethylene and one or more derived units of C4-C20 alpha-olefins having the following features: (i) content of ethylene derived units higher than 50% by mol and lower than 92% by mol; (ii) intrinsic viscosity (IV) higher than 1.2 dL/g and lower than 6 dL/g; (iii) density ranging from 0.850 to 0.890 g/cm<sup>3</sup>; and (iv) a crystallinity content, expressed as the enthalpy of fusion, lower than 62 J/g c) from 5% to 25% by weight of a copolymer of propylene and ethylene having the following features: (i) content of propylene derived units higher than 50% by mol and lower than 92% by mol; (ii) intrinsic viscosity (IV) higher than 2 dL/g and lower than 6 dL/g; (iii) density ranging from 0.850 to 0.890 g/cm<sup>3</sup>; (iv) the value of the product of reactivity ratios  $r_1 r_2$  lower than 2; and (v) a crystallinity content, expressed as the enthalpy of fusion, lower than 45 J/g wherein the weight ratio between the ethylene copolymer (component b) and the sum of component b) and component c) is equal to or higher than 0.5 and less than or equal to 0.9.



**WO 2005/044911 A1**

## POLYPROPYLENE COMPOSITION

The present invention relates to a propylene polymer composition having improved impact-stiffness balance.

Because of their excellent rigidity, heat resistance and impact resistance propylene polymers are used for various molded articles in many fields. In order to improve some properties such as impact resistance and stiffness, propylene polymers are blended with various other polymers, such as rubbers, in order to obtain materials useful for various and different uses such as components for automotive.

EP 844 280 relates to a propylene resin composition comprising a polypropylene resin and a rubber component in specific proportions. The rubber component comprises an ethylene random copolymer and a propylene/1-butene random copolymer. Both polymers are obtained by using a metallocene catalyst component. The weight ratio between the ethylene random copolymer and the propylene/1-butene random copolymer is comprised in the range 95/5 to 20/80.

EP 936 247 relates to a propylene resin composition comprising a polypropylene resin, an ethylene/alpha-olefin random copolymer and a propylene/ethylene/1-butene random copolymer. In particular the propylene/ethylene/1-butene random copolymer comprises 50-88 mole % of units derived from propylene, 2-30 mole % of units derived from ethylene and 10-40 mole % of units derived from 1-butene.

EP 816 395 discloses a process for preparing a propylene polymer composition comprising a first stage in which a propylene polymer is prepared, a second stage in which a propylene rubber is prepared and a third stage in which it is prepared an ethylene rubber. The three stages are carried out by using a metallocene-based catalyst. According to this document, the resulting composition has an excellent rigidity, heat resistance and impact resistance.

The applicant has surprisingly found that the impact-stiffness balance in a propylene polymer composition can be further improved.

An object of the present invention is a propylene polymer composition comprising the following components:

- a) from 50% to 90% by weight of a propylene homopolymer or a propylene copolymer containing up to 5% by mol of derived units of C<sub>2</sub>-C<sub>20</sub> alpha-olefins, having the following features:

- (i) a polydispersity index  $PI > 3$ ; preferably  $PI > 3.5$ ; more preferably  $PI > 4$ ;
- (ii) melt flow rate (MFR), as measured at  $230^{\circ}\text{C}$  under a load of 2.16 kg,  $MFR > 1$  dg/min; and
- (iii) fraction soluble in xylene at  $25^{\circ}\text{C}$  (XSRT)  $> 1\%$
- b) from 5% to 25% by weight a copolymer of ethylene and one or more derived units of  $\text{C}_4\text{-C}_{20}$  alpha-olefins having the following features:
  - (i) content of ethylene derived units higher than 50% by mol and lower than 92% by mol;
  - (ii) intrinsic viscosity (IV) higher than 1.2 dL/g and lower than 6 dL/g;
  - (iii) density ranging from 0.850 to 0.890 g/cm<sup>3</sup>; and
  - (iv) a crystallinity content, expressed as the enthalpy of fusion, lower than 62 J/g
- c) from 5% to 25% by weight of a copolymer of propylene and ethylene having the following features:
  - (i) content of propylene derived units higher than 50% by mol and lower than 92% by mol;
  - (ii) intrinsic viscosity (IV) higher than 2 dL/g and lower than 6 dL/g;
  - (iii) density ranging from 0.850 to 0.890 g/cm<sup>3</sup>
  - (iv) the value of the product of reactivity ratios  $r_1 \times r_2$  lower than 2; and
  - (v) a crystallinity content, expressed as the enthalpy of fusion, lower than 45 J/g

wherein the weight ratio between the ethylene copolymer (component b) and the sum of component b) and component c) (propylene copolymer) is equal to or higher than 0.5 and less than or equal to 0.9.

In the propylene polymer component a) of the present invention preferably the 2,1 regioerrors are not detectable in a  $^{13}\text{C}$  NMR spectrum recorded at a 300 MHz instrument. The melt flow rate (MFR), as measured at  $230^{\circ}\text{C}$  under a load of 2.16 kg is preferably  $> 20$  dg/min; more preferably  $> 50$  dg/min; even more preferably  $> 55$  dg/min. The fraction soluble in xylene at  $25^{\circ}\text{C}$  (XSRT) is preferably  $> 1.5\%$ , even more preferably  $> 1.8\%$ .

The propylene polymer component a) of the present invention can be prepared according to known technologies by polymerization of propylene, optionally with one or more comonomers selected from  $\text{C}_2\text{-C}_{20}$  alpha-olefins, in the presence of conventional catalysts of the Ziegler/Natta type comprising the product of the reaction between an aluminium alkyl and a solid

component comprising a transition metal supported on  $\text{MgCl}_2$  in an active form. In particular, the best results are obtained when using catalysts comprising the product of the reaction between:

- (i) a solid component comprising a titanium compound without Ti- $\pi$  bonds and an electron donor compound (internal donor) supported on a magnesium halide in an active form;
- (ii) an Al-alkyl compound and, if appropriate, an electron donor compound (external donor).

The use of an external electron donor compound is generally necessary to obtain propylene polymers having an isotacticity (mm) greater than 80. Nevertheless, if compounds of the type described in Patent EP-A-361,493 are used as internal electron donor compounds, the stereospecificity of the catalyst is by itself sufficiently high and it is not necessary to use an external electron donor compound.

The magnesium halides, preferably  $\text{MgCl}_2$ , in an active form used as support for Ziegler-Natta catalysts are widely known from the patent literature. The U.S. Patents 4,298,718 and 4,495,338 described for the first time the use of these compounds in Ziegler-Natta catalysis. It is known from these patents that the magnesium halides used in the active form as support or co-support in catalyst components for the polymerization of olefins are characterized by X-ray spectra in which the most intense diffraction line appearing in the spectra of the inactive halide is reduced in intensity and replaced by a halo whose intensity maximum is displaced towards angles which are smaller with respect to that of the most intense line.

The titanium compound is preferably selected from the halides and halogeno-alcoholates.

Preferred titanium compounds are  $\text{TiCl}_4$ ,  $\text{TiCl}_3$  and the halogeno-alcoholates of the formula  $\text{Ti}(\text{OR}^1)_m\text{X}_n$  in which  $\text{R}^1$  is a hydrocarbon radical with 1-12 carbon atoms or a group  $\text{COR}^1$ , X is halogen and  $(m+n)$  is the valency of the titanium.

Advantageously, the catalytic component (i) is used in the form of spherical particles having an average diameter of between about 10 and 150  $\mu\text{m}$ . Suitable methods for preparing the said components in a spherical form are described, for example, in the Patents EP-A-395,083, EP-A-553,805 and EP-A-553,806, the description of which, relating to the method of preparation and to the characteristics of the products, is incorporated herein by reference.

Suitable internal electron donor compounds include the ethers, esters and in particular the esters of polycarboxylic acids, the amines, the ketones and the 1,3-diethers of the type described in the Patents EP-A-361,493, EP-A-361,494, EP-A-362,705 and EP-A-451,645.

The Al-alkyl compound (ii) is preferably selected from the aluminium trialkyls, such as, for example, Al-triethyl, Al-triisobutyl, Al-tri-n-butyl, Al-tri-n-hexyl and Al-tri-n-octyl.

Mixtures of Al-trialkyls with Al-alkyl halides, Al-alkyl hydrides or Al-alkyl sesquichlorides such as  $\text{AlEt}_2\text{Cl}$  and  $\text{Al}_2\text{Et}_3\text{Cl}_3$  may also be used.

The external donor can be of the same type as or can differ from the internal donor. If the internal donor is the ester of a polycarboxylic acid, in particular a phthalate, the external donor is preferably selected from the silicon compounds of the formula  $\text{R}_1\text{R}_2\text{Si}(\text{OR})_2$ , where  $\text{R}_1$  and  $\text{R}_2$  are alkyl, cycloalkyl or aryl radicals having 1-18 carbon atoms. Examples of such silanes are methyl-cyclohexyl-dimethoxy-silane, diphenyl-dimethoxy-silane, methyl-t-butyl-dimethoxy-silane and dicyclopentyl-dimethoxy-silane.

Component b) of the composition of the present invention is a copolymer of ethylene and one or more derived units of  $\text{C}_4$ - $\text{C}_{20}$  alpha-olefins having the following features:

- (i) content of ethylene derived units higher than 50% by mol and lower than 92% by mol;
- (ii) intrinsic viscosity (IV) higher than 1.2 dL/g and lower than 6 dL/g;
- (iii) density ranging from 0.850 to 0.890 g/cm<sup>3</sup>
- (iv) a crystallinity content, expressed as the enthalpy of fusion, lower than 62 J/g

The content of derived units of  $\text{C}_4$ - $\text{C}_{20}$  alpha-olefins preferably ranges from 5% to 40% by mol, more preferably from 10% to 30% by mol.

The intrinsic viscosity (IV) is preferably higher than 1.25 dL/g and lower than 3.0 dL/g more preferably it is higher than 1.28 dL/g and lower than 2.8 dL/g.

The enthalpy of fusion is preferably lower than 50 J/g; more preferably it is lower than 30 J/g; even more preferably it is lower than 25 J/g.

Preferably component b) is endowed with a value of the product of reactivity ratios  $r_1 r_2$  lower than 5; preferably lower than 4.

Examples of  $\text{C}_2$ - $\text{C}_{20}$  alpha-olefins that can be used as comonomers are: 1-butene, 1-pentene, 4-methyl-1-pentene, 1-hexene, 1-octene, 4,6-dimethyl-1-heptene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene and 1-eicosene. Preferred comonomers are 1-butene and 1-octene.

The product of the reactivity ratios  $r_1 \cdot r_2$  are calculated according to the following formula:

$$r_1 r_2 = 4[\text{EE}] [\text{OO}]/[\text{EO}]^2$$

wherein [EE] and [OO] represent the mole fractions of the ethylene units and the alpha-olefin units, respectively, in the ethylene copolymer and [EO] is a proportion of number of ethylene/alpha-olefin alternating chains in the total number of dyad chains.

The values of EE, OO and OE can be determined by a  $^{13}\text{C}$ -NMR spectrum recorded at a 300 MHz instrument according to M. Kakugo, Y. Naito, K. Mizunuma, and Macromolecules 1982, 15, 1150-1152 and J. C. Randall JMS-REV. Macromol. Chem. Phys., C29 (2&3), 201-317 (1989).

These ethylene copolymers are obtainable by polymerizing ethylene and one or more alpha olefins in the presence of a metallocene compound having at least one cyclopentadienyl moiety which is  $\pi$ -bonded to the central metal.

Component c) of the composition of the present invention is a copolymer of propylene and ethylene having the following features:

- (i) content of propylene derived units higher than 50% by mol and lower than 92% by mol;
- (ii) intrinsic viscosity (IV) higher than 2 dL/g and lower than 6 dL/g;
- (iii) density ranging from 0.850 to 0.890 g/cm<sup>3</sup>
- (iv) the value of the product of reactivity ratios  $r_1 \times r_2$  is lower than 2;
- (v) a crystallinity content, expressed as the enthalpy of fusion, lower than 45 J/g

The content of propylene derived units preferably ranges from 50% by mol to 80% by mol; more preferably from 60% by mol to 75% by mol.

The content of ethylene derived units in the component c) is lower than 50% by mol, preferably it ranges from 50% by mol to 20% by mol; more preferably it ranges from 40% by mol to 15% by mol.

The intrinsic viscosity is preferably higher than 2 dL/g and lower than 4 dL/g, more preferably it is higher than 2 dL/g and lower than 3 dL/g.

The enthalpy of fusion is preferably lower than 35 J/g; more preferably it is lower than 30 J/g.

The value of the product of reactivity ratios  $r_1 \times r_2$  is preferably lower than 1.8; more preferably it is lower than 1.6.

These propylene/ethylene copolymers are obtainable by polymerizing propylene and ethylene in the presence of a metallocene compound having at least one cyclopentadienyl moiety which is  $\pi$ -bonded to the central metal.

The value of the product of reactivity ratios  $r_1 \times r_2$  can be calculated according to the following equation.

$$r_1 \times r_2 = 4[\text{PP}] [\text{EE}]/[\text{PE}]^2$$


wherein [PP] and [EE] represent the mole fractions of the propylene units and the ethylene units, respectively, in the propylene/ethylene copolymer and [PE] is a proportion of number of propylene/ethylene alternating chains in the total number of dyad chains.

The values of [PP], [EE] and [PE] can be determined by a  $^{13}\text{C}$ -NMR spectrum recorded at a 300 MHz instrument according to M. Kakugo, Y. Naito, K. Mizunuma, *Macromolecules* 1982, 15, 1150-1152 and J. C. Randall *JMS-REV. Macromol. Chem. Phys.*, C29 (2&3), 201-317 (1989).

Preferably the weight ratio between the ethylene copolymer (component b) and the sum of component b and component c (propylene copolymer) is comprised between 0.55 and 0.85 more preferably between 0.60 and 0.80.

Preferably the composition of the present invention contains from 50% to 80% by weight of a propylene polymer component a), from 25% to 9% by weight of component b) and from 25% to 11% by weight of component c).

A preferred class of metallocene compounds that can be used for obtaining component b) and c) of the composition of the present invention are those belonging to the following formulas (I), (II) or (III):

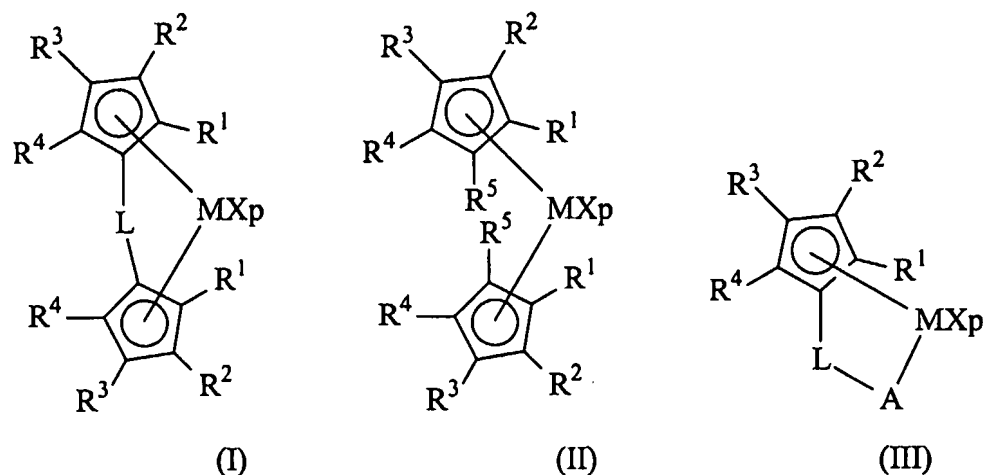

wherein

M is a transition metal belonging to group 4, 5 or to the lanthanide or actinide groups of the Periodic Table of the Elements; preferably M is zirconium, titanium or hafnium;

the substituents X, equal to or different from each other, are monoanionic sigma ligands selected from the group consisting of hydrogen, halogen,  $\text{R}^6$ ,  $\text{OR}^6$ ,  $\text{OCOR}^6$ ,  $\text{SR}^6$ ,  $\text{NR}^6_2$  and  $\text{PR}^6_2$ , wherein  $\text{R}^6$  is a linear or branched, saturated or unsaturated  $\text{C}_1$ - $\text{C}_{20}$  alkyl,  $\text{C}_3$ - $\text{C}_{20}$  cycloalkyl,  $\text{C}_6$ - $\text{C}_{20}$  aryl,  $\text{C}_7$ - $\text{C}_{20}$  alkylaryl or  $\text{C}_7$ - $\text{C}_{20}$  arylalkyl group, optionally containing one

or more Si or Ge atoms; or two X can optionally form a substituted or unsubstituted butadienyl radical or a OR'O group wherein R' is a divalent radical selected from C<sub>1</sub>-C<sub>20</sub> alkylidene, C<sub>6</sub>-C<sub>40</sub> arylidene, C<sub>7</sub>-C<sub>40</sub> alkylarylidene and C<sub>7</sub>-C<sub>40</sub> arylalkylidene radicals; the substituents X are preferably the same and are preferably R<sup>6</sup>, OR<sup>6</sup> and NR<sup>6</sup><sub>2</sub>; wherein R<sup>6</sup> is preferably a C<sub>1</sub>-C<sub>7</sub> alkyl, C<sub>6</sub>-C<sub>14</sub> aryl or C<sub>7</sub>-C<sub>14</sub> arylalkyl group, optionally containing one or more Si or Ge atoms; more preferably, the substituents X are selected from the group consisting of -Cl, -Br, -Me, -Et, -n-Bu, -sec-Bu, -Ph, -Bz, -CH<sub>2</sub>SiMe<sub>3</sub>, -OEt, -OPr, -OBu, -OBz and -NMe<sub>2</sub>;

p is an integer equal to the oxidation state of the metal M minus 2;

L is a divalent bridging group selected from C<sub>1</sub>-C<sub>20</sub> alkylidene, C<sub>3</sub>-C<sub>20</sub> cycloalkylidene, C<sub>6</sub>-C<sub>20</sub> arylidene, C<sub>7</sub>-C<sub>20</sub> alkylarylidene, or C<sub>7</sub>-C<sub>20</sub> arylalkylidene radicals optionally containing heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements, and silylidene radical containing up to 5 silicon atoms such as SiMe<sub>2</sub>, SiPh<sub>2</sub>; preferably L is a divalent group (ZR<sup>7</sup><sub>m</sub>)<sub>n</sub>; Z being C, Si, Ge, N or P, and the R<sup>7</sup> groups, equal to or different from each other, being hydrogen or linear or branched, saturated or unsaturated C<sub>1</sub>-C<sub>20</sub> alkyl, C<sub>3</sub>-C<sub>20</sub> cycloalkyl, C<sub>6</sub>-C<sub>20</sub> aryl, C<sub>7</sub>-C<sub>20</sub> alkylaryl or C<sub>7</sub>-C<sub>20</sub> arylalkyl groups or two R<sup>7</sup> can form a aliphatic or aromatic C<sub>4</sub>-C<sub>7</sub> ring;

m is 1 or 2, and more specifically it is 1 when Z is N or P, and it is 2 when Z is C, Si or Ge; n is an integer ranging from 1 to 4; preferably n is 1 or 2;

more preferably L is selected from Si(CH<sub>3</sub>)<sub>2</sub>, SiPh<sub>2</sub>, SiPhMe, SiMe(SiMe<sub>3</sub>), CH<sub>2</sub>, (CH<sub>2</sub>)<sub>2</sub>, (CH<sub>2</sub>)<sub>3</sub> or C(CH<sub>3</sub>)<sub>2</sub>;

R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup>, R<sup>4</sup> and R<sup>5</sup>, equal to or different from each other, are hydrogen atoms, halogen atoms or linear or branched, saturated or unsaturated C<sub>1</sub>-C<sub>20</sub>-alkyl, C<sub>3</sub>-C<sub>20</sub>-cycloalkyl, C<sub>6</sub>-C<sub>20</sub>-aryl, C<sub>7</sub>-C<sub>20</sub>-alkylaryl, or C<sub>7</sub>-C<sub>20</sub>-arylalkyl radicals, optionally containing one or more heteroatoms belonging to groups 13-17 of the Periodic Table of the Elements; or two adjacent R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup>, R<sup>4</sup> and R<sup>5</sup> form one or more 3-7 membered ring optional containing heteroatoms belonging to groups 13-17 of the periodic table; such as to form with the cyclopentadienyl moiety, for example, the following radicals: indenyl; mono-, di-, tri- and tetra-methyl indenyl; 2-methyl indenyl, 3-butyl-indenyl, 2-isopropyl-4-phenyl indenyl, 2-methyl-4-phenyl indenyl, 2-methyl-4,5 benzo indenyl; 3-trimethylsilyl-indenyl; 4,5,6,7-tetrahydroindenyl; fluorenyl; 5,10-dihydroindeno[1,2-b]indol-10-yl; N-methyl- or N-phenyl-5,10-dihydroindeno [1,2-b]indol-10-yl; 5,6-dihydroindeno[2,1-b]indol-6-yl; N-methyl-or N-phenyl-5,6-dihydroindeno[2,1-b]indol-6-yl; azapentalene-4-yl; thiapentalene-4-yl; azapentalene-6-yl; thiapentalene-6-yl;



mono-, di- and tri-methyl-azapentalene-4-yl, 2,5-dimethyl-cyclopenta[1,2-b:4,3-b']-dithiophene.

Non limiting examples of compounds belonging to formula (I) (II) and (III) are the following compounds (when possible in either their meso or racemic isomers, or mixtures thereof):

bis(cyclopentadienyl)zirconium dichloride;

bis(indenyl)zirconium dichloride;

bis(tetrahydroindenyl)zirconium dichloride;

bis(fluorenyl)zirconium dichloride;

(cyclopentadienyl)(indenyl)zirconium dichloride;

(cyclopentadienyl)(fluorenyl)zirconium dichloride;

(cyclopentadienyl)(tetrahydroindenyl)zirconium dichloride;

(fluorenyl)(indenyl)zirconium dichloride;

bis(1-methyl-3-n-butyl-cyclopentadienyl)zirconium dichloride;

dimethylsilanediylbis(indenyl)zirconium dichloride,

dimethylsilanediylbis(2-methyl-4-phenylindenyl)zirconium dichloride,

dimethylsilanediylbis(4-naphthylindenyl)zirconium dichloride,

dimethylsilanediylbis(2-methylindenyl)zirconium dichloride,

dimethylsilanediylbis(2-methyl-4-t-butylindenyl)zirconium dichloride,

dimethylsilanediylbis(2-methyl-4-isopropylindenyl)zirconium dichloride,

dimethylsilanediylbis(2,4-dimethylindenyl)zirconium dichloride,

dimethylsilanediylbis(2-methyl-4,5-benzoidindenyl)zirconium dichloride,

dimethylsilanediylbis(2,4,7-trimethylindenyl)zirconium dichloride,

dimethylsilanediylbis(2,4,6-trimethylindenyl)zirconium dichloride,

dimethylsilanediylbis(2,5,6-trimethylindenyl)zirconium dichloride,

methyl(phenyl)silanediylbis(2-methyl-4,6-diisopropylindenyl)-zirconium dichloride,

methyl(phenyl)silanediylbis(2-methyl-4-isopropylindenyl)-zirconium dichloride,

1,2-ethylenebis(indenyl)zirconium dichloride,

1,2-ethylenebis(4,7-dimethylindenyl)zirconium dichloride,

1,2-ethylenebis(2-methyl-4-phenylindenyl)zirconium dichloride,

1,4-butanediylbis(2-methyl-4-phenylindenyl)zirconium dichloride,

1,2-ethylenebis(2-methyl-4,6-diisopropylindenyl)zirconium dichloride,

1,4-butanediylbis(2-methyl-4-isopropylindenyl)zirconium dichloride,  
 1,4-butanediylbis(2-methyl-4,5-benzoindenyl)zirconium dichloride,  
 1,2- ethylenebis (2-methyl-4,5-benzoindenyl)zirconium dichloride,  
 [4-( $\eta^5$ -cyclopentadienyl)-4,6,6-trimethyl( $\eta^5$ -4,5-tetrahydro-pentalene)]dimethylzirconium,  
 [4-( $\eta^5$ -3'-trimethylsilylcyclopentadienyl)-4,6,6-trimethyl( $\eta^5$ -4,5-tetrahydropentalene)]dimethylzirconium,  
 (tert-butylamido)(tetramethyl- $\eta^5$ -cyclopentadienyl)-1,2-ethane-dimethyltitanium,  
 (methylamido)(tetramethyl- $\eta^5$ -cyclopentadienyl)dimethylsilyl-dimethyltitanium,  
 (methylamido)(tetramethyl- $\eta^5$ -cyclopentadienyl)-1,2-ethanediyl-dimethyltitanium,  
 (tertbutylamido)-(2,4-dichloride-2,4-pentadien-1-yl)dimethylsilyl-dimethyltitanium,  
 bis(1,3-dimethylcyclopentadienyl)zirconium dichloride,  
 methylene(3-methyl-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])  
 dithiophene)zirconium dichloride;  
 methylene(3-isopropyl-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])  
 dithiophene)zirconium dichloride;  
 methylene(2,4-dichloride-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])  
 dithiophene)zirconium dichloride;  
 methylene(2,3,5-trimethyl-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])  
 dithiophene)zirconium dichloride;  
 methylene-1-(indenyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])dithiophene)zirconium  
 dichloride and dichloride;  
 methylene-1-(indenyl)-7-(2,5-ditrimethylsilylcyclopentadienyl-[1,2-b:4,3-b'])  
 dithiophene)zirconium dichloride;  
 methylene-1-(3-isopropyl-indenyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])  
 dithiophene)zirconium dichloride;  
 methylene-1-(2-methyl-indenyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])  
 dithiophene)zirconium dichloride;  
 methylene-1-(tetrahydroindenyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])  
 dithiophene)zirconium dichloride;  
 methylene(2,4-dichloride-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])  
 dioxazol)zirconium dichloride;  
 methylene(2,3,5-trimethyl-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'])

dioxazol)zirconium dichloride;  
 methylene-1-(indenyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b']dioxazol)zirconium dichloride and dichloride;  
 isopropylidene(3-methyl-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'] dithiophene)zirconium dichloride;  
 isopropylidene(2,4-dichloride-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'] dithiophene)zirconium dichloride;  
 isopropylidene(2,4-diethyl-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'] dithiophene)zirconium dichloride;  
 isopropylidene(2,3,5-trimethyl-cyclopentadienyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b'] dithiophene)zirconium dichloride;  
 isopropylidene-1-(indenyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b']dithiophene)zirconium dichloride;  
 isopropylidene-1-(2-methyl-indenyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b']dithiophene)zirconium dichloride;  
 dimethylsilandiyl-1-(2-methyl-indenyl)-7-(2,5-dimethylcyclopentadienyl-[1,2-b:4,3-b']dithiophene)hafnium dichloride;  
 dimethylsilanediyl(3-tert-butyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
 dimethylsilanediyl(3-isopropyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
 dimethylsilanediyl(3-methyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
 dimethylsilanediyl(3-ethyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
 1-2-ethane(3-tert-butyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
 1-2-ethane (3-isopropyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
 1-2-ethane (3-methyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
 1-2-ethane (3-ethyl-cyclopentadienyl)(9-fluorenyl)zirconium dichloride,  
 dimethylsilandiylbis-6-(3-methylcyclopentadienyl-[1,2-b]-thiophene) dichloride;  
 dimethylsilandiylbis-6-(4-methylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
 dimethylsilandiylbis-6-(4-isopropylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
 dimethylsilandiylbis-6-(4-ter-butylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
 dimethylsilandiylbis-6-(3-isopropylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;  
 dimethylsilandiylbis-6-(3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilandiylbis-6-(2,5-dichloride-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium di methyl;

dimethylsilandiylbis-6-[2,5-dichloride-3-(2-methylphenyl)cyclopentadienyl-[1,2-b]-thiophene]zirconium dichloride;

dimethylsilandiylbis-6-[2,5-dichloride-3-(2,4,6-trimethylphenyl)cyclopentadienyl-[1,2-b]-thiophene]zirconium dichloride;

dimethylsilandiylbis-6-[2,5-dichloride-3-mesitylenecyclopentadienyl-[1,2-b]-thiophene]zirconium dichloride;

dimethylsilandiylbis-6-(2,4,5-trimethyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilandiylbis-6-(2,5-diethyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilandiylbis-6-(2,5-diisopropyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilandiylbis-6-(2,5-diter-butyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilandiylbis-6-(2,5-ditrimethylsilyl-3-phenylcyclopentadienyl-[1,2-b]-thiophene)zirconium dichloride;

dimethylsilandiylbis-6-(3-methylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;

dimethylsilandiylbis-6-(3-isopropylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;

dimethylsilandiylbis-6-(3-phenylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;

dimethylsilandiylbis-6-(2,5-dichloride-3-phenylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;

dimethylsilandiylbis-6-[2,5-dichloride-3-(2-methylphenyl)cyclopentadienyl-[1,2-b]-silole]zirconium dichloride;

dimethylsilandiylbis-6-[2,5-dichloride-3-(2,4,6-trimethylphenyl)cyclopentadienyl-[1,2-b]-silole]zirconium dichloride;

dimethylsilandiylbis-6-[2,5-dichloride-3-mesitylenecyclopentadienyl-[1,2-b]-silole]zirconium dichloride;

dimethylsilandiylbis-6-(2,4,5-trimethyl-3-phenylcyclopentadienyl-[1,2-b]-silole)zirconium dichloride;


[dimethylsilyl(tert-butylamido)][tetramethylpentadienyl]titanium dichloride;

[dimethylsilyl(tert-butylamido)][1-indenyl]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][9-fluorenyl]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(N-methyl-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(6-methyl-N-methyl-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(6-methoxy-N-methyl-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(N-ethyl-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(N-phenyl-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(6-methyl-N-phenyl-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(6-methoxy-N-phenyl-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(N-methyl-3,4-dichloride-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(N-ethyl-3,4-dichloride-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
[dimethylsilyl(tert-butylamido)][(N-phenyl-3,4-dichloride-1,2-dihydrocyclopenta[2,1-b]indol-2-yl)]titanium dichloride;  
Dimethylsilandiylbis(2-methyl-4-p-tert-butylphenylindenyl)zirconium dichloride;  
Dimethylsilandiyl(2-isopropyl-4-p-tert-butylphenylindenyl)(2-methyl-4-p-tert-butylphenylindenyl)zirconium dichloride;  
Dimethylsilandiyl(2-isopropyl-4-p-tert-butylphenylindenyl)(2-methyl-4-p-tert-butyl-7-methylphenylindenyl)zirconium dichloride;  
as well as the corresponding zirconium dimethyl, hydrochloro dihydro and  $\eta^4$ -butadiene compounds.

Suitable metallocene complexes belonging to formulas (I), (II) or (III) are described in WO 98/22486, WO 99/58539 WO 99/24446, USP 5,556,928, WO 96/22995, EP-485822, EP-485820, USP 5,324,800, EP-A-0 129 368, USP 5,145,819, EP-A-0 485 823, WO 01/47939, WO 01/44318, PCT/EP02/13552, EP-A-0 416 815, EP-A-0 420 436, EP-A-0 671 404, EP-A-0 643 066 and WO-A-91/04257.


These compounds are usually used in conjunction with an alumoxane or a compound able to give an alkylmetallocene cation.

The alumoxanes used in the catalyst according to the invention are considered to be linear, branched or cyclic compounds containing at least one group of the type:




wherein the substituents U, same or different, are defined above.

In particular, alumoxanes of the formula:



can be used in the case of linear compounds, wherein  $n^1$  is 0 or an integer of from 1 to 40 and the substituents U are defined as above; or alumoxanes of the formula:



can be used in the case of cyclic compounds, wherein  $n^2$  is an integer from 2 to 40 and the U substituents are defined as above.

Examples of alumoxanes suitable for use according to the present invention are methylalumoxane (MAO), tetra-(isobutyl)alumoxane (TIBAO), tetra-(2,4,4-trimethylpentyl)alumoxane (TIOAO), tetra-(2,3-dimethylbutyl)alumoxane (TDMBAO) and tetra-(2,3,3-trimethylbutyl)alumoxane (TTMBAO).

Particularly interesting cocatalysts are those described in WO 99/21899 and in WO01/21674 in which the alkyl and aryl groups have specific branched patterns.

Non-limiting examples of aluminium compounds that can be reacted with water to give suitable alumoxanes described in WO 99/21899 and WO01/21674, are:

tris(2,3,3-trimethyl-butyl)aluminium, tris(2,3-dimethyl-hexyl)aluminium, tris(2,3-dimethyl-

butyl)aluminium, tris(2,3-dimethyl-pentyl)aluminium, tris(2,3-dimethyl-heptyl)aluminium, tris(2-methyl-3-ethyl-pentyl)aluminium, tris(2-methyl-3-ethyl-hexyl)aluminium, tris(2-methyl-3-ethyl-heptyl)aluminium, tris(2-methyl-3-propyl-hexyl)aluminium, tris(2-ethyl-3-methyl-butyl)aluminium, tris(2-ethyl-3-methyl-pentyl)aluminium, tris(2,3-diethyl-pentyl)aluminium, tris(2-propyl-3-methyl-butyl)aluminium, tris(2-isopropyl-3-methyl-butyl)aluminium, tris(2-isobutyl-3-methyl-pentyl)aluminium, tris(2,3,3-trimethyl-pentyl)aluminium, tris(2,3,3-trimethyl-hexyl)aluminium, tris(2-ethyl-3,3-dimethyl-butyl)aluminium, tris(2-ethyl-3,3-dimethyl-pentyl)aluminium, tris(2-isopropyl-3,3-dimethyl-butyl)aluminium, tris(2-trimethylsilyl-propyl)aluminium, tris(2-methyl-3-phenyl-butyl)aluminium, tris(2-ethyl-3-phenyl-butyl)aluminium, tris(2,3-dimethyl-3-phenyl-butyl)aluminium, tris(2-phenyl-propyl)aluminium, tris[2-(4-fluoro-phenyl)-propyl]aluminium, tris[2-(4-chloro-phenyl)-propyl]aluminium, tris[2-(3-isopropyl-phenyl)-propyl]aluminium, tris(2-phenyl-butyl)aluminium, tris(3-methyl-2-phenyl-butyl)aluminium, tris(2-phenyl-pentyl)aluminium, tris[2-(pentafluorophenyl)-propyl]aluminium, tris[2,2-diphenyl-ethyl]aluminium and tris[2-phenyl-2-methyl-propyl]aluminium, as well as the corresponding compounds wherein one of the hydrocarbyl groups is replaced with a hydrogen atom, and those wherein one or two of the hydrocarbyl groups are replaced with an isobutyl group.

Amongst the above aluminium compounds, trimethylaluminium (TMA), triisobutylaluminium (TIBA), tris(2,4,4-trimethyl-pentyl)aluminium (TIOA), tris(2,3-dimethylbutyl)aluminium (TDMBA) and tris(2,3,3-trimethylbutyl)aluminium (TTMBA) are preferred.

Non-limiting examples of compounds able to form an alkylmetallocene cation are compounds of formula  $D^+E^-$ , wherein  $D^+$  is a Brønsted acid, able to donate a proton and to react irreversibly with a substituent X of the metallocene of formula (I) and  $E^-$  is a compatible anion, which is able to stabilize the active catalytic species originating from the reaction of the two compounds, and which is sufficiently labile to be removed by an olefinic monomer. Preferably, the anion  $E^-$  comprises one or more boron atoms. More preferably, the anion  $E^-$  is an anion of the formula  $BAr_4^{(-)}$ , wherein the substituents Ar which can be identical or different are aryl radicals such as phenyl, pentafluorophenyl or bis(trifluoromethyl)phenyl. Tetrakis-pentafluorophenyl borate is particularly preferred compound, as described in WO 91/02012. Moreover, compounds of formula  $BAr_3$  can be conveniently used. Compounds of this type are described, for example, in the International patent application WO 92/00333. Other examples of

compounds able to form an alkylmetallocene cation are compounds of formula  $\text{BAr}_3\text{P}$  wherein P is a substituted or unsubstituted pyrrol radical. These compounds are described in WO01/62764. Compounds containing boron atoms can be conveniently supported according to the description of DE-A-19962814 and DE-A-19962910. All these compounds containing boron atoms can be used in a molar ratio between boron and the metal of the metallocene comprised between about 1:1 and about 10:1; preferably 1:1 and 2:1; more preferably about 1:1.

Non limiting examples of compounds of formula  $\text{D}^+\text{E}^-$  are:

Triethylammoniumtetra(phenyl)borate,  
Tributylammoniumtetra(phenyl)borate,  
Trimethylammoniumtetra(tolyl)borate,  
Tributylammoniumtetra(tolyl)borate,  
Tributylammoniumtetra(pentafluorophenyl)borate,  
Tributylammoniumtetra(pentafluorophenyl)aluminate,  
Tripropylammoniumtetra(dimethylphenyl)borate,  
Tributylammoniumtetra(trifluoromethylphenyl)borate,  
Tributylammoniumtetra(4-fluorophenyl)borate,  
N,N-Dimethylbenzylammonium-tetrakis(pentafluorophenyl)borate,  
N,N-Dimethylhexylammonium-tetrakis(pentafluorophenyl)borate,  
N,N-Dimethylaniliniumtetra(phenyl)borate,  
N,N-Diethylaniliniumtetra(phenyl)borate,  
N,N-Dimethylaniliniumtetrakis(pentafluorophenyl)borate,  
N,N-Dimethylaniliniumtetrakis(pentafluorophenyl)aluminate,  
N,N-Dimethylbenzylammonium-tetrakis(pentafluorophenyl)borate,  
N,N-Dimethylhexylammonium-tetrakis(pentafluorophenyl)borate,  
Di(propyl)ammoniumtetrakis(pentafluorophenyl)borate,  
Di(cyclohexyl)ammoniumtetrakis(pentafluorophenyl)borate,  
Triphenylphosphoniumtetrakis(phenyl)borate,  
Triethylphosphoniumtetrakis(phenyl)borate,  
Diphenylphosphoniumtetrakis(phenyl)borate,  
Tri(methylphenyl)phosphoniumtetrakis(phenyl)borate,  
Tri(dimethylphenyl)phosphoniumtetrakis(phenyl)borate,  
Triphenylcarbeniumtetrakis(pentafluorophenyl)borate,



Triphenylcarbeniumtetrakis(pentafluorophenyl)aluminate,

Triphenylcarbeniumtetrakis(phenyl)aluminate,

Ferroceniumtetrakis(pentafluorophenyl)borate,

Ferroceniumtetrakis(pentafluorophenyl)aluminate.

Triphenylcarbeniumtetrakis(pentafluorophenyl)borate, and

N,N-Dimethylaniliniumtetrakis(pentafluorophenyl)borate.

With the composition of the present invention it is possible to obtain a final material having an enhanced impact-stiffness balance with respect the similar composition of the prior art.

The following examples are given to illustrate and not to limit the invention.

### **Experimental section**

#### **General procedure**

##### **The intrinsic viscosity**

The intrinsic viscosity (IV) was measured in tetrahydronaphthalene (THN) at 135°C.

##### **Fraction soluble in xylene at 25°C (XSRT)**

2 g of polymer are dissolved in 250 ml of xylene at 135°C, while agitating. After 20 minutes the solution is left to cool, still under agitation, until it reaches 25°C. After 30 minutes the precipitated material is filtered through filter paper, the solution is evaporated in nitrogen current and the residual is dried under vacuum at 80°C until it reaches constant weight. Thus the percentage of polymer soluble in xylene at 25°C is calculated.

##### **Melt Flow Rate**

Melt Flow Rate (MFR) was measured according to ASTM D1238- 230° C; 2.16 kg

##### **Determination of the 2,1 regioerrors:**

2,1 regioerrors were determined by means of C<sup>13</sup>-NMR spectra recorded at a Varian 300 MHz instrument according to the methodology described by J.C. Randall in "Polymer sequence determination Carbon 13 NMR method", Academic Press 1977. The content of regoinversions is calculated on the basis of the relative concentration of S<sub>αβ</sub> + S<sub>ββ</sub> methylene sequences.

##### **Effective density**

Density was measured according to ASTM-D 792

##### **Enthalpy of fusion**

Enthalpy of fusion was determined with a differential scanning calorimetry (DSC) were carried out on an instrument DSC 2920 from TA Instruments., according to the following

procedure. About 5 mg of sample is equilibrated at -20°C for 5 min., then the temperature is ramped up at 10°C/min to 235 °C, and held for 3 min under nitrogen. The temperature is then ramped down at 10°C/min to -20°C and held for 5 min. The temperature is then ramped up again for a second heat at 10°C/min to 235 °C. The values reported are those obtained in the first scan.

#### Monomer contents

Monomer contents were determined by using C<sup>13</sup>-NMR spectra.

#### Determination of polydispersity index (PI)

This property is strictly connected with the molecular weight distribution of the polymer under examination. In particular it is inversely proportional to the creep resistance of the polymer in the molten state. Said resistance called modulus separation at low modulus value (500 Pa), was determined at a temperature of 200 °C by using a parallel plates rheometer model RMS-800 marketed by RHEOMETRICS (USA), operating at an oscillation frequency which increases from 0.1 rad/sec to 100 rad/sec. From the modulus separation value, one can derive the P.I. by way of the equation:

$$P.I. = 54.6 * (\text{modulus separation})^{-1.76}$$

in which the modulus separation is defined as:

$$\text{modulus separation} = \text{frequency at } G' = 500 \text{ Pa} / \text{frequency at } G'' = 500 \text{ Pa}$$

wherein G' is storage modulus and G'' is the loss modulus.

#### Determination of r<sub>1</sub>xr<sub>2</sub> reactivity ratios

r<sub>1</sub>xr<sub>2</sub> reactivity ratios were determined by means of C<sup>13</sup>-NMR spectra recorded at a Varian 300 MHz instrument.

For component b) r<sub>1</sub>xr<sub>2</sub> were determined according to the following formula

$$r_1 x r_2 = 4[EE] [OO] / [EO]^2$$

wherein [EE] and [OO] represent the mole fractions of the ethylene units and the 1-octene units, respectively, in the ethylene copolymer and [EO] is a proportion of number of ethylene/1-octene alternating chains in the total number of dyad chains.

For component c) r<sub>1</sub>xr<sub>2</sub> were determined according to the following formula

$$r_1 x r_2 = 4[PP] [EE] / [PE]^2$$

wherein [PP] and [EE] represent the mole fractions of the propylene units and the ethylene units, respectively, in the propylene/ethylene copolymer and [PE] is a proportion of number of propylene/ethylene alternating chains in the total number of dyad chains.

Assignments of the diads were made according to M. Kakugo, Y. Naito, K. Mizunuma, *Macromolecules* 1982, 15, 1150-1152 and J. C. Randall *JMS-REV. Macromol. Chem. Phys.*, C29 (2&3), 201-317 (1989).

### Components of the composition

#### Component a)

Component a-1) was obtained according to run 4 of EP 03102001.9

component a-2) was obtained according to Example 1 of EP728769 with an hydrogen concentration of about 3.4 NI.

component a-3) was obtained as described in example 5 of EP728769, using Cyclohexylmethyldimethoxysilane instead of 9,9-bis-(methoxymethyl)fluorene, 75° as polymerization temperature and 3350ppm hydrogen in the feed.

The features of components a) are reported in table 1.

Table 1				
Comp	PI	MFR dg/min	XSRT %	2,1 regioerrors %
a-1	2.4	50	0.6	present
a-2	3.8	60	3.8	n.d.
a-3	5	63	2	n.d.

n.d. not detectable

#### Component b)

Component b) was an ethylene/1-octene copolymer sold by DuPont Dow elastomers with the trademark Engage® 8180 having the following features:

Ethylene content (NMR)	85.7% by mol
1-octene content (NMR)	14.3% by mol
intrinsic viscosity	2.1 dL/g
density	0.863 g/cm <sup>3</sup>
r1xr2	3.637
enthalpy of fusion	21.5 J/g

#### Component c)

component c) was obtained according to the following procedure by using rac-dimethylsilanediyl(2-methyl-4-(4'-tert-butylphenyl)indenyl)(2-isopropyl-4-(4'-tert-butylphenyl)indenyl)zirconium dichloride (A-1) as metallocene catalyst component prepared according to the procedure described in WO 01/48034.

Polymerizations were conducted in a 1 gallon stainless steel autoclave. The autoclave was swept with dry argon at 90 °C for 1 h prior to polymerization. 2 mg of the metallocene compound described above was dissolved in 50 ml of a 7 wt % hexane solution of MAO, shaken for 10 minutes, and added to the reactor at 15 °C. 12000 g of a mixture propylene/propane, with 12.5% by weight of propylene, were added to the reactor. The reactor was thermostated at 40 °C, and ethylene overpressure was added. The zirconocene/MAO solution was then charged to the reactor through a stainless steel tube using a controlled amount of argon gas pressure. The reactor and contents were heated to 60 °C while ethylene was fed on demand (50 g. of ethylene were feed) with a mass flow controller to maintain the desired reactor overpressure. Constant overpressure was maintained throughout the run. Carbon monoxide gas was charged to the reactor 2 h after reaching polymerization temperature and the residual monomer was vented while cooling the reactor to room temperature. The polymer was removed and dried in a vacuum oven at 50 °C for 1 h. The features of the propylene copolymer obtained are reported in table 2.

Table 2				
ethylene content % mol	IV dL/g	density gm/cm <sup>3</sup>	r1xr2	enthalpy of fusion J/g
30.7	2.23	0.87	1.52	16.3

#### Preparation of compositions general procedure

To all samples 0.2 parts by weight per 100 parts by weight polymer of A.O. B-225 (an antioxidant consisting of 50% Irgafos 168 and 50% Irganox 1010) and 0.1 parts by weight per 100 parts by weight polymer of calcium stearate were added.

Samples were prepared by tumble blending about 5 lbs total weight by hand in a plastic bag. Then the samples were pelletized using a 25 mm Berstorff twin screw extruder with screw 25-09 (a low shear type), a feed rate of 50, at 280 RPM, and 350 F feed temperature setting increasing to 400 F at the die. Injection molded specimens were made using the ISO test bar mold for flex and Izod and molded per ISO 1873-2.

Chord modulus, Izod impact, and tensile strength were measured according to ISO methods. The properties of the compositions are reported in table 3.

<b>Table 3</b>					
	<b>Ex 1*</b>	<b>Ex 2</b>	<b>Ex 3*</b>	<b>Ex 4</b>	<b>Ex 5</b>
component a)					
a-1	70%		80%		
a-2		70%		80%	
a-3					80
component b)	20%	20%	13.33	13.33	13.33
component c)	10%	10%	6.67	6.67	6.67
ratio b)/b)+c)	0.66	0.66	0.66	0.66	0.66
MFR, 2.16Kg, @ 230 C dg/min	21	20	30	31	18
young modulus (MPa)	859	972	1083	1265	1340
tensile strength at yields (MPa)	17.2	18.3	21	23	21.7
% elongation at yield	10.8	10	9.7	8.7	6.5
tensile strength at break (MPa)	13	14.4	14.7	13.8	16.4
% elongation at break	>440	>440	>440	>440	155
chord modulus 1%/sec (MPa)	641	728	804	943	1117
Izod -30 C, KJ/m <sup>2</sup>	5.7	6.7	2.8	3.5	5.3
Izod -40 C, KJ/m <sup>2</sup>	4.9	5.5	2.7	3.5	4.8

\* comparative examples

From table 4 it clearly results that the examples according to the invention show an improved impact-stiffness balance of properties.

**CLAIMS**

1. A propylene polymer composition comprising the following components:
  - a) from 50% to 90% by weight of a propylene homopolymer or a propylene copolymer containing up to 5% by mol of derived units of C<sub>2</sub>-C<sub>20</sub> alpha-olefins, having the following features:
    - (i) a polydispersity index  $PI > 3$ ;
    - (ii) melt flow rate (MFR), as measured at 230°C under a load of 2.16 kg,  $MFR > 1$  dg/min; and
    - (iii) fraction soluble in xylene at 25°C (XSRT)  $> 1\%$
  - b) from 5% to 25% by weight a copolymer of ethylene and one or more derived units of C<sub>4</sub>-C<sub>20</sub> alpha-olefins having the following features:
    - (i) content of ethylene derived units higher than 50% by mol and lower than 92% by mol;
    - (ii) intrinsic viscosity (IV) higher than 1.2 dL/g and lower than 6 dL/g;
    - (iii) density ranging from 0.850 to 0.890 g/cm<sup>3</sup>; and
    - (iv) a crystallinity content, expressed as the enthalpy of fusion, lower than 62 J/g
  - c) from 5% to 25% by weight of a copolymer of propylene and ethylene having the following features:
    - (i) content of propylene derived units higher than 50% by mol and lower than 92% by mol;
    - (ii) intrinsic viscosity (IV) higher than 2 dL/g and lower than 6 dL/g;
    - (iii) density ranging from 0.850 to 0.890 g/cm<sup>3</sup>;
    - (iv) the value of the product of reactivity ratios  $r_1 \times r_2$  lower than 2; and
    - (v) a crystallinity content, expressed as the enthalpy of fusion, lower than 45 J/g

wherein the weight ratio between the ethylene copolymer (component b) and the sum of component b) and component c) is equal to or higher than 0.5 and less than or equal to 0.9.

2. The propylene polymer composition according to claim 1 wherein component a) is further characterized in that 2,1 regioerrors are not detectable in a <sup>13</sup>C NMR spectrum recorded at a 300 MHz instrument.

3. The propylene polymer composition according to claim 1 wherein component b) is further characterized in that the value of the product of reactivity ratios  $r_1 \times r_2$  is lower than 5.
4. The propylene polymer composition according to claim 1 wherein the content of component a) ranges from 50% to 80% by weight; the content of component b) ranges from 25% to 9% by weight and the content of component c) ranges from 25% to 11% by weight.
5. The propylene polymer composition according to claim 1 wherein in component b) the content of derived units of alpha-olefins preferably ranges from 5% to 40% by mol.
6. The propylene polymer composition according to claim 1 wherein in component b) the intrinsic viscosity (IV) is higher than 1.25 dL/g and lower than 3.0 dL/g.
7. The propylene polymer composition according to claim 1 wherein in component b) the enthalpy of fusion is preferably lower than 50 J/g.
8. The propylene polymer composition according to claim 1 wherein in component b) the comonomer is 1-butene or 1-octene.
9. The propylene polymer composition according to claim 1 wherein in the component c) the content of propylene derived units preferably ranges from 50% to 80% by mol, and the content of ethylene derived ranges from 50% to 20% by mol.
10. The propylene polymer composition according to claim 1 wherein in the component c) the intrinsic viscosity is preferably higher than 2 dL/g and lower than 4 dL/g.
11. The propylene polymer composition according to claim 1 wherein in the component c) the value of the product of reactivity ratios  $r_1 \times r_2$  is lower than 1.8.
12. The propylene polymer composition according to claim 1 wherein in the component c) the enthalpy of fusion is preferably lower than 35 J/g.
13. The propylene polymer composition according to claim 1 wherein component b) is obtained by polymerizing ethylene and one or more  $C_2$ - $C_{20}$  alpha olefins in the presence of a metallocene compound having at least one cyclopentadienyl moiety which is  $\pi$ -bonded to the central metal and component c) is obtained by polymerizing propylene and ethylene in the presence of a metallocene compound having at least one cyclopentadienyl moiety which is  $\eta$ -bonded to the central metal.

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 C08L23/10

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 03/051984 A (BASELL POLIOLEFINE ITALIA S.P.A; PELLICONI, ANTEO; CAGNANI, CAMILLO) 26 June 2003 (2003-06-26) example 1	1-13
A	EP 0 844 280 A (MITSUI CHEMICALS, INC) 27 May 1998 (1998-05-27) cited in the application example 1	1-13
A	EP 1 236 769 A (BOREALIS TECHNOLOGY OY) 4 September 2002 (2002-09-04) example 1	1-13
A	EP 0 728 769 A (MONTPELL NORTH AMERICA INC) 28 August 1996 (1996-08-28) examples 1,5	1-13



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

11 February 2005

Date of mailing of the international search report

04/03/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Schmidt, H



Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03051984	A	26-06-2003	AU 2002358668 A1	30-06-2003
			BR 0207073 A	27-01-2004
			CA 2470660 A1	26-06-2003
			WO 03051984 A1	26-06-2003
			EP 1456294 A1	15-09-2004
EP 0844280	A	27-05-1998	CA 2222076 A1	26-05-1998
			CN 1183432 A ,C	03-06-1998
			DE 69711156 D1	25-04-2002
			DE 69711156 T2	14-11-2002
			EP 0844280 A1	27-05-1998
			ID 19190 A	28-06-1998
			JP 10212382 A	11-08-1998
			SG 65032 A1	25-05-1999
			TW 448209 B	01-08-2001
EP 1236769	A	04-09-2002	EP 1236769 A1	04-09-2002
			WO 02072693 A1	19-09-2002
			EP 1373403 A1	02-01-2004
			US 2004116607 A1	17-06-2004
EP 0728769	A	28-08-1996	IT MI950318 A1	21-08-1996
			IT MI950317 A1	21-08-1996
			AT 169937 T	15-09-1998
			AU 699522 B2	03-12-1998
			AU 4559496 A	29-08-1996
			BR 9600767 A	23-12-1997
			CA 2169401 A1	22-08-1996
			CN 1143651 A ,C	26-02-1997
			DE 69600532 D1	24-09-1998
			DE 69600532 T2	18-03-1999
			EP 0728769 A1	28-08-1996
			ES 2121446 T3	16-11-1998
			FI 960786 A	22-08-1996
			HK 1010379 A1	07-04-2000
			HU 9600390 A2	28-04-1997
			IL 117114 A	17-02-2000
			IN 186169 A1	30-06-2001
			JP 9020803 A	21-01-1997
			NO 960669 A	22-08-1996
			RU 2156260 C2	20-09-2000
			US 2004235645 A1	25-11-2004
			ZA 9601292 A	27-08-1996